



## BITUMAT B2 Automatic Welder

The BITUMAT B2 is a high-speed flameless automatic welding machine for welding modified bitumen roofing (SBS, APP). It produces significantly better weld strength than open-flame welding, is more economical, and is safer to use.

- Flame-free welding of modified bitumen
- High process reliability and uniform welding results
- Temperature, air flow, and drive speed independently adjustable
- Drive speed of up to 12 m/min
- High-power nozzle specially developed for bitumen welding
- Ergonomic, adjustable guide handle
- Only one operator needed for welding


### Technical Data

Voltage	V	230
Power consumption	W	6700
Temperature	°C	200 - 650
Speed	m/min.	0.8 - 12
Air Flow Range	%	85 - 100
Width of welding nozzle	mm	75 / 100
Size (L x W x H)	mm	690 x 490 x 330
Weight	kg	40
Approval markings		CE, QPS
Electrical protection		Class I







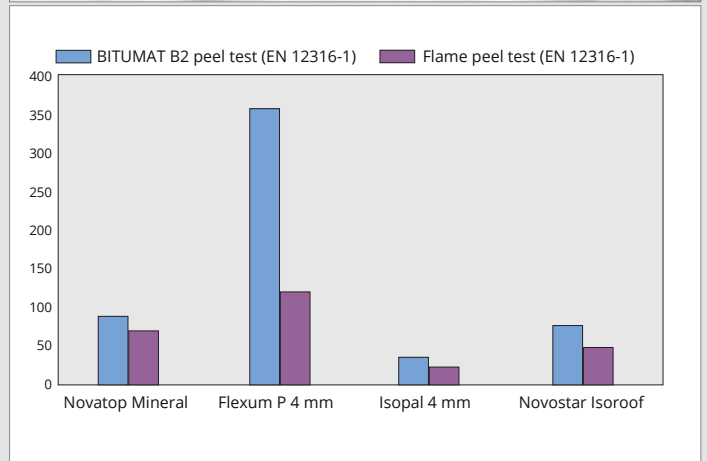






### Article No.:

140.441 BITUMAT B2 230 V / 6700 W, 75 mm, without plug  
 138.386 BITUMAT B2 230 V / 6700 W, 100 mm, without plug

Included in delivery: BITUMAT B2, storage case



# BITUMAT B2 Accessories

					
<p>155.328: Bitumen kit 120 mm</p>	<p>137.895: Pressure roller, 100 mm, steel, with gap</p>	<p>140.229: Pressure roller 100 mm, steel, without gap</p>	<p>158.222: Pressure roller 100 mm, silicone</p>	<p>137.896: Pressure roller, 75 mm, steel, with gap</p>	<p>140.228: Pressure roller 75 mm, steel, without gap</p>
					
<p>156.447: Pressure roller 80 mm, silicone</p>	<p>138.048: Overlap welding nozzle 75 mm</p>	<p>138.047: Overlap welding nozzle 100 mm</p>	<p>140.476: Lifting device</p>	<p>140.489: Storage box</p>	<p>138.817: Stainless steel brush</p>
					
<p>137.855: Leister knife</p>					